


EZO ON EZO






ezo on ezo gives you style, depth and sound absorption while adding visual appeal, making every office space a better place to work in.

Absorb sound and create visual interest all in one simple solution...

ezoBord's 'ezo on ezo' product range layers our popular Work Zone Divider patterns on a second layer of contrasting color ezoBord creating a 3 dimensional, colorful appearance while adding significant sound absorption in your open space.

Made with recycled plastic water bottles.




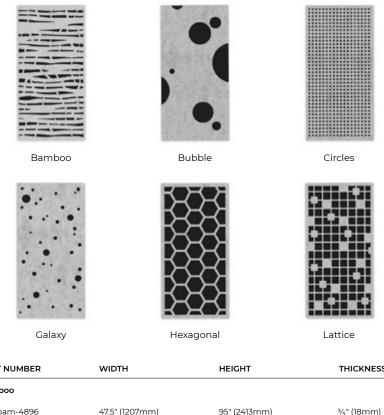

PART NUMBER	RT NUMBER WIDTH		THICKNESS				
Bamboo							
eoe-bam-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				
Bubble							
eoe-bub-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				
Circles - Standard circle is 1" (25mm) diameter							
eoe-cir-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				
Galaxy							
eoe-glx-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				
Hexagonal							
eoe-hex-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				
Lattice							
eoe-ltt-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)				


Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.



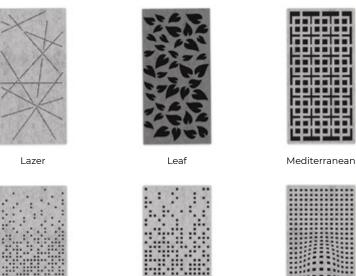

Pixelated Circles






Rectangular Undulation

PART NUMBER	WIDTH	HEIGHT	THICKNESS			
Lazer						
eoe-lzr-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			
Leaf						
eoe-lef-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			
Mediterranean						
eoe-med-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			
Pixelated Circles - Standard circle is 1" (25mm) diameter						
eoe-pxc-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			
Pixelated Squares - Standard square is 1" (25mm) x 1" (25mm)						
eoe-pxs-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			
Rectangular Undulation						
eoe-rec-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)			

Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.



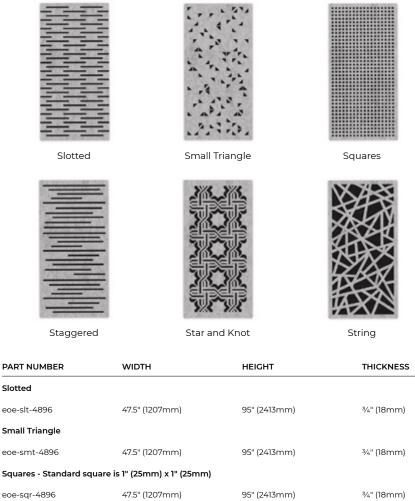

		()	(
Staggered			
eoe-stg-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)
Star and Knot			
eoe-snk-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)
String			
eoe-str-4896	47.5" (1207mm)	95" (2413mm)	¾" (18mm)

Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.





Tilt

n) ³ ⁄4" (18mm)


Please note that all dimensions are nominal, supplier reserves the right to adjust sizing without prior notification.



COMPONENTS



Panels



RECOMMENDED HARDWARE (NOT INCLUDED)

ezoTape DST-010, DST-015, DST-020



Contractor grade adhesive (not sold by most ezoBord distributors)





CUSTOMIZABLE PARAMETERS

Geometric Properties Width and height

Color

Each 9mm layer can be manufactured with different color

Digital Print

Custom graphics and textures can be printed on panels





SPECIFICATIONS

Patterns

19 standard patterns available.

Sizes

Available in one size:

• 47.5" (1207mm) × 95" (2413mm)

Thickness

Available in one standard thickness:

• ¾" (9mm) | ±0.5mm

Composition

100% PET (min. %50 recycled content)

Product Variances


Variation in fiber mix and colour may occur. All products will be supplied within commercial tolerances.

Cleaning

Remove dust and dirt with a stiff plastic bristle brush. Distilled water can be used to remove stains. Always use a soft, clean cloth and blot dry. Vacuuming works great as well.

Installation

ezo on ezo products can be hung unobtrusively through holes covered by ezoBord plugs, with double sided ezoTape or with any standard clear drying contractor grade adhesive.



Fire Testing

North America:

- ASTM E-84 Class A*
- CAN ULC S102-10
- Europe and UK:
 - EN13501-1: 2007

Acoustics

Refer to ASTM C423 test chart for specific absorption rates/frequency.

- ¾" (9mm): NRC 0.75 (subject to mounting conditions and geometrical properties)
- ½" (12mm): NRC 0.85 (subject to mounting conditions and geometrical properties)

USGBC LEED v4 Credits

While individual products do not 'earn' LEED credits, ezoBord can contribute to the following LEED v4 Credits. Please refer to the USGBC LEED credit guides for detailed requirements.

- EQc9 for enhancing acoustic performance
- MRc3 BPDO for sourcing of raw materials for recycled contribution
- EQc6 interior lighting for surface reflectance (lighter color options).

Environment

Made of polyester fiber, min. 50% of which comes from recycled water bottles which contributes to LEED MR Credit and BREEAM Health and Wellbeing, Materials points due to recycled content, acoustic performance, and low emitting materials. No VOC's: CDPH v1.2 and REACH SVHC Compliant.



* Upon request, 1/2"(12mm) sheet material is treated with USA origin post-production flame retardant to Class A surface burning characteristics. Post sheet production FR treatment does not contain any Red List Restricted Chemicals and complies with California Proposition 65. Contact customer service for technical information, test data and safety data sheets for flame retardant.



NOISE REDUCTION - 3/4" (18mm)

Constructed from


Two sheets of ¾" (9mm) ezoBord

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	SAA	125	250	500	1000	2000	4000
0.60	0.58	0.07	0.15	0.42	0.80	0.98	1.03

Divider Pattern

Galaxy



FREQUENCY (Hz)



STANDARD COLORS - 3/8" (9mm)

PB09	CG06	ES07	DG34	SG04
PURE BLACK	CHARCOAL GRAY	EBONY SLATE	DARK GRAY	SILVER GRAY
CW04	LB01	DS10	SD18	TO24
CLASSIC WHITE	LIGHT BEIGE	DESERT SAND	SUNNY DAYS	TIGER ORANGE
RR28	DP30	MN12	PI14	GA41
RUBY RED	DEEP PURPLE	MIDNIGHT NAVY	POLAR ICE	GREEN APPLE





CONNECT WITH US

www.ezoBord.com

@ @ezobord

- 🥑 @ezobord
- in linkedin.com/company/ezobord

ezoBord is a registered trademark of iVekter Inc.

USA

Ayrsonics Midwest LLC 170 Prairie Lake Rd East Dundee, IL 60118 1-800-517-0686 sales@mw.ayrsonics.com

CANADA

Ayrsonics Inc. 825 Trillium Drive Kitchener ON N2R 1J9 1-844-441-1122 sales@ayrsonics.com

UNITED KINGDOM

ezoBord UK LTD Unit 20 Westwood Business Park Margate, Kent, CT9 4JJ +44 7981 111236 sales@ezobord.co.uk