



RAIL

ezo
BOARD



MEET RAIL



Cross Configuration: Rythm and sequence



With Rail we are going beyond illumination for interior spaces. True to our acoustic roots, we incorporate the performance of EzoBord material to LED technology providing a synergistic relation between acoustics and lighting as a solution to high-end noise levels, reverberation and poor lighting issues common to open spaces.

Designed in collaboration with Metalumen, Rail comes with a variety of light color temperatures and as a mix with our classic Baffle Systems (“Vesi” and “Veldi”).

RAIL ACOUSTIC Baffles

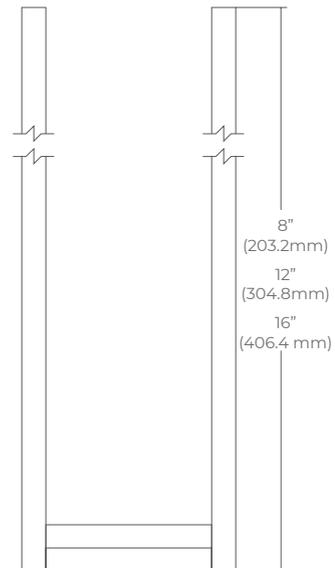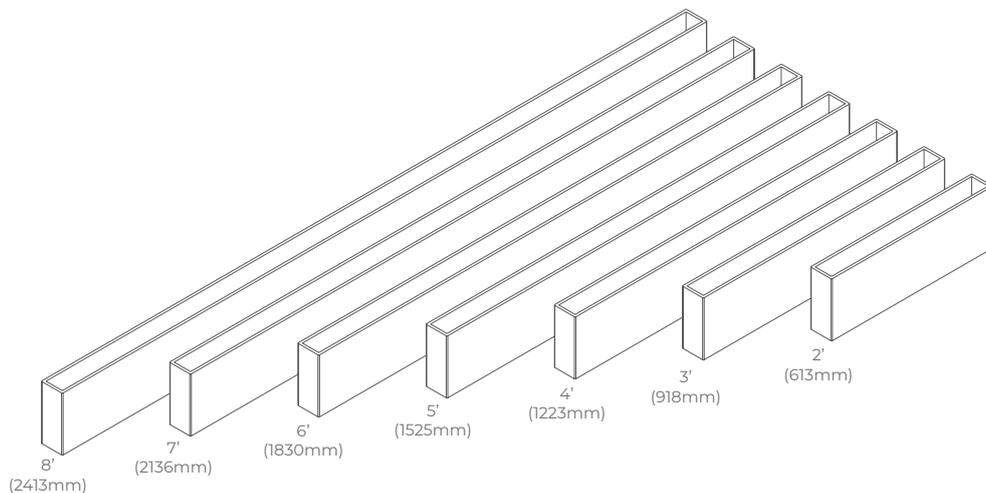

LENGTHS

2' (609.6 mm)
3' (914.4 mm)
4' (1219.2 mm)
5' (1524 mm)

6' (1828.8 mm)
7' (2133.6 mm)
8' (2438.4 mm)

HEIGHTS

8" (203.2mm)
12" (304.8mm)
16" (406.4mm)

THICKNESS 3/8" (9mm) or 1/2" (12mm) | ±0.5mm

WEIGHT 3/8" (9mm) sheet: 8.4lbs (3.8kg) | ±5%
1/2" (12mm) sheet: 16.0lbs (7.26kg) | ±5%

HARDNESS 60-65 (Shore C)

COMPOSITION

100% PET (min. %50 recycled content)

PRODUCT VARIANCES

Variation in fiber mix and colour may occur. All products will be supplied within commercial tolerances.

FIRE TESTING

NORTH AMERICA:

- ASTM E-84 Class A*
- CAN ULC S102-10

EUROPE AND UK:

- EN13501-1: 2007

ACOUSTICS

Refer to ASTM C423 test chart for specific absorption rates/frequency.

- 3/8" (9mm): NRC 0.75 (subject to mounting conditions and geometrical properties)
 - 1/2" (12mm): NRC 0.85 (subject to mounting conditions and geometrical properties)
- (subject to mounting conditions and geometrical properties)*

ENVIRONMENT

Made of polyester fiber, min. 50% of which comes from recycled water bottles which contributes to LEED MR Credit and BREEAM Health and Wellbeing, Materials points due to recycled content, acoustic performance, and low emitting materials. No VOC's: CDPH v1.2 and REACH SVHC Compliant.



PRODUCT VARIANCES

Variation in fiber mix and color may occur. All products will be supplied within commercial tolerances.

GENERAL

Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.

RAIL LED LIGHTS

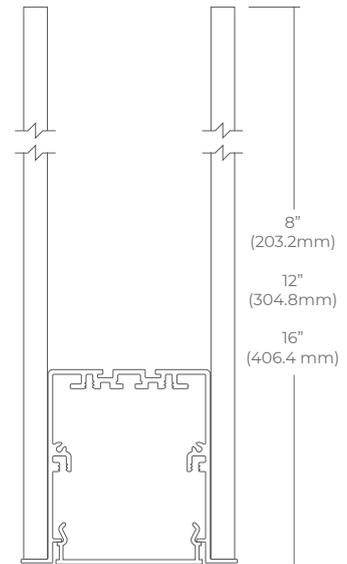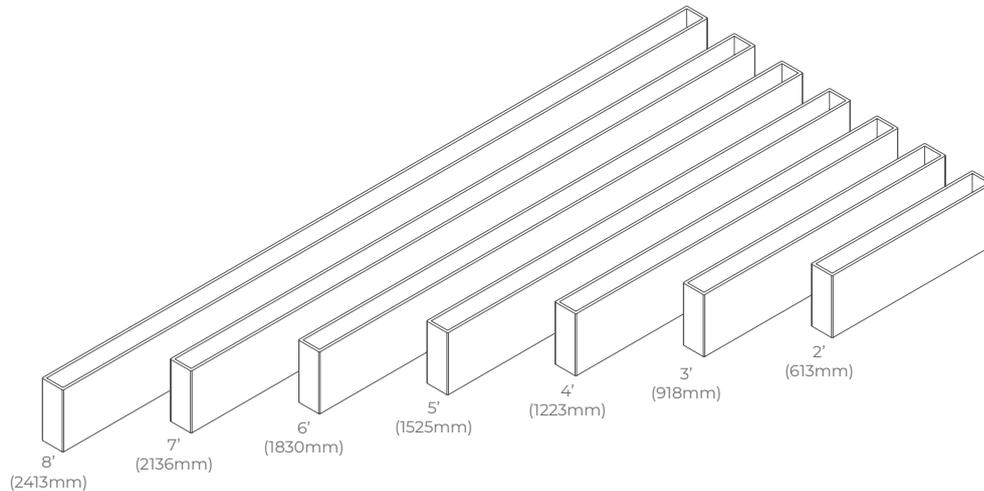

LENGTHS

2' (609.6 mm)
3' (914.4 mm)
4' (1219.2 mm)
5' (1524 mm)

HEIGHTS

6' (1828.8 mm)
7' (2133.6 mm)
8' (2438.4 mm)
16" (406.4mm)

THICKNESS

Aluminum end caps.OPTICAL SYSTEM

Metalumen luminaires are designed to utilize leading edge LED technology combined with luminaire optimized reflectors and our custom diffusers, resulting in industry leading optical performance.

WEIGHT

0.95 kg/300mm [2.1 lb/ft]

HOUSING

Rigid extruded aluminum body, 2.0mm (0.08") nominal wall

CRI

83+ for 3500K, 80 minimum for all CCTs in standard configurations.

LUMEN MAINTENANCE

Minimum 50,000h with TM-21 lumen maintenance of 85% @ 25°C ambient temperature (calculated based on IESNA LM-80-08 LED test data). L70: ≥60,000hrs.

PAINT FINISHES

Satin aluminum, white and black are standard finishes. For custom finish, contact factory.

MOUNTING

Aircraft cable yoke complete with a Quick-Grip field adjustable suspension system. Threaded rod for t-bar and unistrut metal framing system.

ELECTRICAL

Factory prewired with easy wire quick connect sections.

DRIVERS

Metalumen offers 0-10V dimming* as a standard on our entire LED product offering. Dimming range is 1%-100%. Power factor is > 90%. Class 2 rating. Drivers are integral.

APPROVALS

All components are UL/ CSA/QPS recognized or listed. RoHS compliant. This product is cULus listed.

ENVIRONMENT

Suitable for dry or damp locations.

*Standard drivers compatible with passive/ sinking dimmers. Please contact Metalumen if active/sourcing dimmer support is required.


NOISE REDUCTION - 3/8" (9MM)

Baffles for LED lighting
 3/8" (9mm) material
Model: LIT
 (6 objects, 12 in. apart)

SABINS:
 Per Lineal Metre: 4.35
 Per Lineal Foot: 1.33

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	125	250	500	1000	2000	4000
1.10	0.2	0.39	0.64	0.92	1.17	1.29

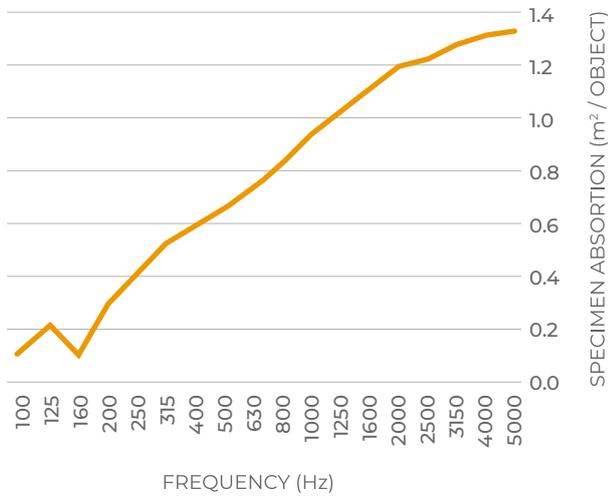


NOISE REDUCTION - 1/2" (12MM)

Baffles for LED lighting
 1/2" (12mm) material
Model: UN-LIT
 (6 objects, 12 in. apart)

SABINS:
 Per Lineal Metre: 4.35
 Per Lineal Foot: 1.33

SOUND ABSORPTION COEFFICIENTS (ASTM C423-17)

NRC	125	250	500	1000	2000	4000
1.20	0.13	0.43	0.66	1.06	1.31	1.4

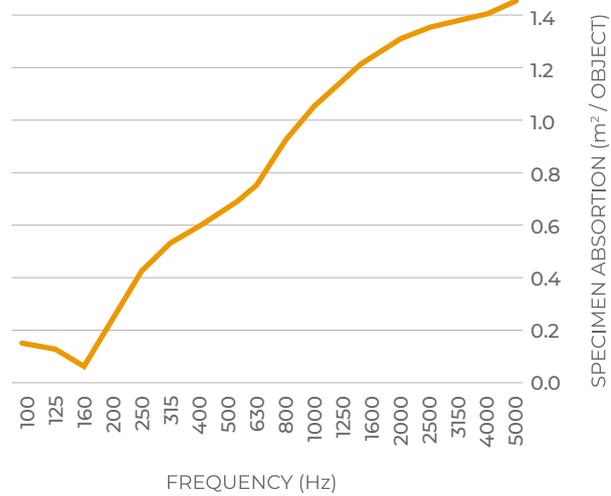

LIGHT DATA

COLOR TEMPERATURES



3000K



3500K



4000K


LIGHT LEVEL PERFORMANCE

3500K, 80 CRI, 0-10V Dimming (Standard)
 per 60000 HOURS of use


Light Level	Lumens per foot	Wattage per foot	Efficacy (lm/W)
L1	500	5.0	99
L2	750	7.6	99
L3	1000	10.1	99




CONFIGURATION OPTIONS

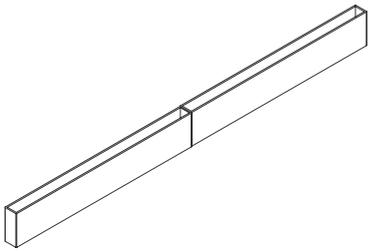


ALIGNED

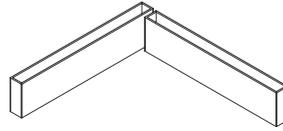


CORNER

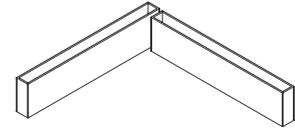


T-SHAPE



CROSS

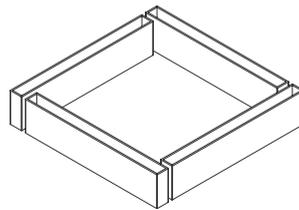

SQUARE

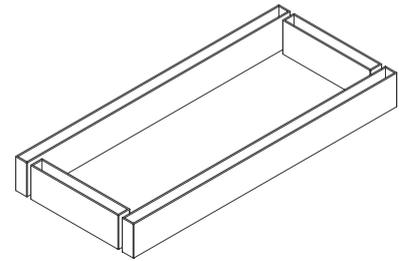


RECTANGULAR






Grid Configuration: illumination and sound absorption at its best


RAIL+RAIL CONFIGURATION

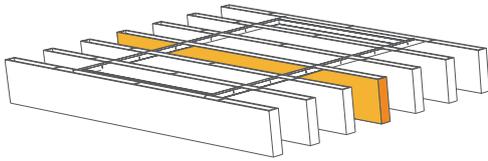

MODULE

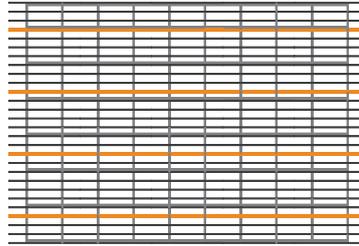

FULL CEILING

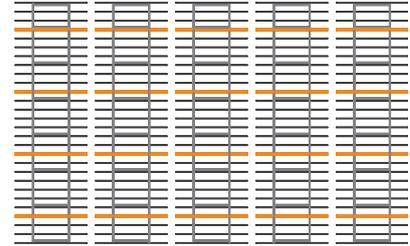


ROWS




RAIL+ RAIL: acoustic and light performance design.


RAIL+VESI CONFIGURATION

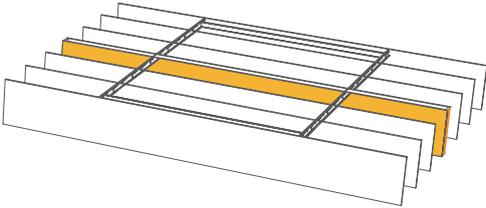

MODULE

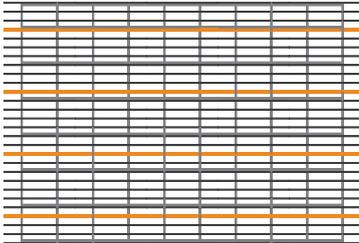

FULL CEILING

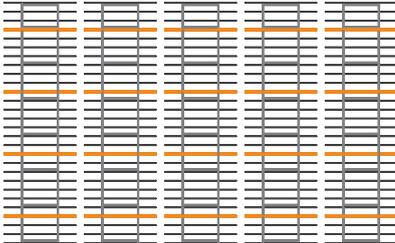


ROWS




RAIL+ VESI: changing the game


RAIL + VELDI CONFIGURATION

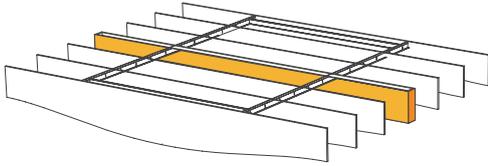

MODULE

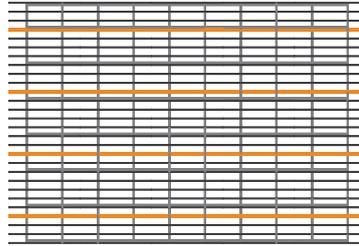

FULL CEILING

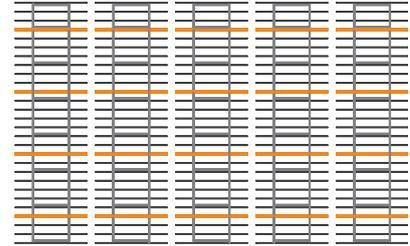

ROWS



RAIL+ VELDI: perfect together to make an statement



Rail makes beautiful any space.



MIX & MATCH YOUR COLORS

PRINT WOOD FINISH & *BASE MATERIAL



DARK OAK
W-DO-07
CG06



GREY OAK
W-GO-08
SG04



WENGE
W-WE-02
CG06



APPLE
W-AP-05
CG06



CHERRY MATE
W-CM-03
DS10



WALNUT
W-WA-01
DG34



ASH
W-AS-06
DS10



YELLOW OAK
W-YO-09
DS10







MARMAR MAPLE
W-MM-04
DS10







BIRCH SAND
W-BS-10
DS10

COLOR & FINISHES

COLORS 3/8" (9MM)

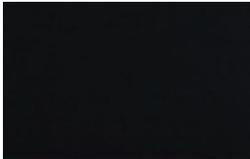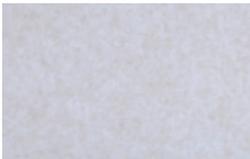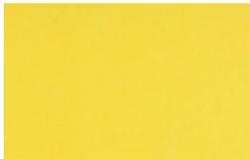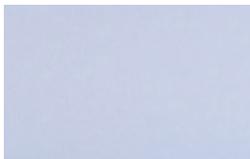				
PURE BLACK PB09	CHARCOAL GRAY CG06	EBONY SLATE ES07	DARK GRAY DG34	SILVER GRAY SG04
				
CLASSIC WHITE CW04	LIGHT BEIGE LB01	DESERT SAND DS10	SUNNY DAYS SD18	TIGER ORANGE TO24
				
RUBY RED RR28	DEEP PURPLE DP30	MIDNIGHT NAVY MN12	POLAR ICE PI14	GREEN APPLE GA41

COLORS 1/2" (12MM)

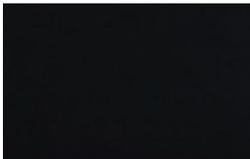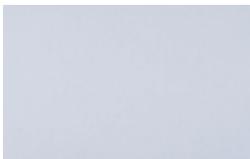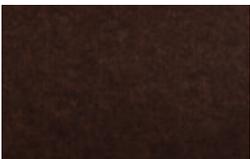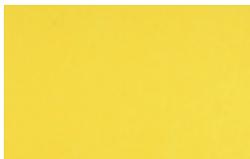				
PURE BLACK PB09	CHARCOAL GRAY CG06	BOLD GRAY BG07	ELEPHANT GRAY EG11	SILVER GRAY SG04
				
CLASSIC WHITE CW04	DESERT SAND DS10	TREE BARK TB35	SUNNY DAYS SD18	BRICK RED BR34
				
GRAPE VINE GV36	ROYAL BLUE RB08	POLAR ICE PI14	OCEAN BLUE OB14	MOSS GREEN MG10





ENVIRONMENT

Our Commitment to the Environment

There are approximately 50 billion water bottles consumed around the world each year, and only about half of those get recycled. The rest end up in landfills, littered through our neighborhoods, or floating in our oceans.

Bottled water consumption has more than doubled since 2000; in 2015 there was the equivalent of more than 5 bottles of water consumed for every person in the USA every single week. This, of course, means that the amount of oil required to produce the energy used for the water bottling process continues to grow.

In 2007, the last year global statistics of oil consumption were available, between 32 million and 54 million barrels of oil were used to produce the bottled water that was consumed in the USA alone. This energy is used to make the bottles from PET pellets (1 million tons in the USA), treat water, bottle the water, label the bottles, and transport the bottled water. Most of the energy consumption occurs in the creation of the bottles themselves. To help in the lifecycle of this plastic product, we have chosen to manufacture our material so that it recycles these PET bottles. We are doing our part to reduce the waste. This acoustical and tackable material is made from PET bottles in a zero-waste process with postindustrial recycling. An environmentally friendly, sustainable, and waste reduced alternative to traditional acoustical/tackable material that looks great in any office, education, or open space installation.

EzoBord is




- low VOC
- formaldehyde free

DID YOU KNOW...



For every pound of recycled PET bottles (approximately 23) energy use is reduced by 84% and greenhouse gas emissions are reduced by 71%.

PET BOTTLES

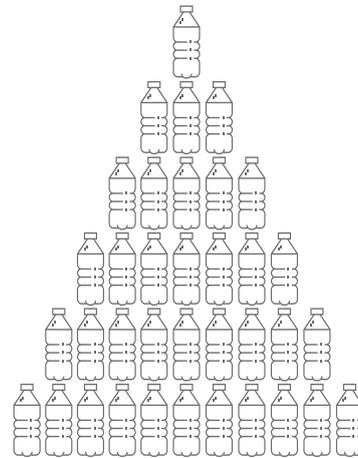

± 166 pet bottles are used to make one $\frac{3}{8}$ " 9mm thick EzoBord sheet.

± 318 pet bottles are used to make one $\frac{1}{2}$ " 12mm thick EzoBord sheet.





DESIGN
DRIVEN
ACOUSTICS

CANADA

Ayrsonics Inc - Ontario

825 Trillium Drive
Kitchener, Ontario N2R 1J9
844-441-1122
sales@ayrsonics.com

Ayrsonics Inc - Alberta

292236 Nose Creek Boulevard
Building 1B, Unit #19
Rocky View County, AB T4A 3N7
844-441-1122
sales@ayrsonics.com

EzoBord Corporate Office

6845 Rexwood Road, Unit 7
Mississauga, ON L4V 1S5
416-665-3571
info@ezobord.com

UNITED STATES

Ayrsonics Midwest LLC

820 Tollgate Road
Elgin, IL 60123
800-517-0686
sales.amw@ayrsonicsusa.com

Ayrsonics Southwest LLC

8934 Eton Ave
Canoga Park, CA 91304
213-833-9700
sales.asw@ayrsonicsusa.com

Ayrsonics Southeast LLC

15 Enterprise Way
Dahlonega, GA 30533
706-539-4711
sales.ase@ayrsonicsusa.com

UNITED KINGDOM

EzoBord UK Limited

Unit 20, Westwood Business Park
Margate, Kent. CT9 4JJ
+44 1843-264027
sales@ezobord.co.uk

IRELAND

EzoBord Ireland Limited

Inniscarra, Main Street,
Rathcoole, Co. Dublin,
D24 EO29, Ireland
+353 1485-4774
sales@ezobord.ie

CENTRAL & LATIN AMERICA

EzoBord Costa Rica SRL

100 Sur 25 Oeste Recope
Bodega #16 Ochomogo, Cartago
+506 8842-4613
info-ebcr@ezobord.com

EzoBord - LATAM

Buenos Aires, Argentina
+54 9 11 5657-1793
info-latam@ezobord.com

FOLLOW US    